

12V

500A

GB20



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 4.0L GAS.

Designed for gas engines up to 4 liters such as ATVs, motorcycles, cars, lawn equipment, and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

20X

UP TO 20 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 500 amps. Full power to jump start a vehicle up to 20 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

GB20

NOCO BOOST SPORT™

12V 500A

INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Blinks "on" and "off" when the internal battery is too hot/too cold.




MANUAL OVERRIDE.

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.




WHAT'S IN THE BOX

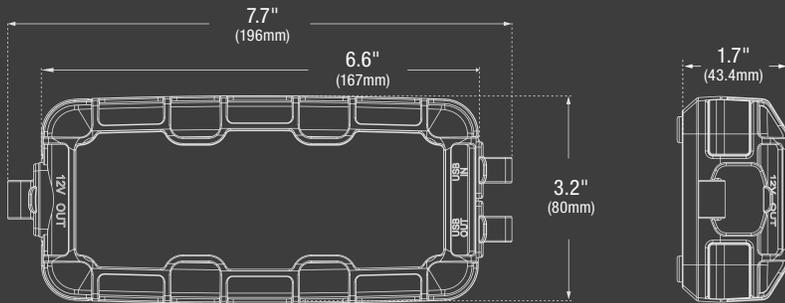

*Accessories not to scale with GB20




40' (1m) USB-MicroUSB



Heavy-Duty Precision Battery Clamps



User Guide



Microfiber Storage Bag



CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 4 smartphone recharges.

RECHARGE TIME

0.5A	12hr
1A	6hr
2A	3hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	24 Watt-Hour Lithium Ion	
PEAK CURRENT RATING:	500A	
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)	
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)	
MICRO USB (INPUT):	5V, 2.1A	
USB (OUTPUT):	5V, 2.1A	
HOUSING PROTECTION:	IP65 (w/Ports Closed)	
COOLING:	Natural Convection	
UNIT WEIGHT:	1.65 lbs (0.74kg)	
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	2.1 lbs (0.95kg)	
LED FLASHLIGHT:	100 Lumens	
VOLUMETRICS:	Retail Packaging: Dimensions: 3.62"x4.57"x8.27" Weight: 2.69lbs UPC: 0-46221-15001-8	Master Carton: Dimensions: 9.25"x12.60"x11.22" Weight: 18.08lbs Quantity: 6 UCC: 10046221150015
	Inner Carton: Dimensions: 4.01"x8.78"x5.12" Weight: 2.87lbs	Units Per Pallet: NA - 360 Units EU - 270 Units



30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V | 1000A

GB40



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 6.0L GAS & 3.0L DIESEL.

Designed for gas engines up to 6 Liters and diesel engines up to 3 Liters for cars, boats, lawn mowers and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

20X

UP TO 20 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 1,000 Amps. Full power to jump start a vehicle up to 20 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 4 smartphone recharges.

RECHARGE TIME

0.5A	12hr
1A	6hr
2A	3hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	24 Watt-Hour Lithium Ion	
PEAK CURRENT RATING:	1000A	
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)	
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)	
MICRO USB (INPUT):	5V, 2.1A	
USB (OUTPUT):	5V, 2.1A	
HOUSING PROTECTION:	IP65 (w/Ports Closed)	
COOLING:	Natural Convection	
UNIT WEIGHT:	1.65 lbs (0.74kg)	
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	2.4 lbs (1.08kg)	
LED FLASHLIGHT:	100 Lumens	
VOLUMETRICS:	Retail Packaging: Dimensions: 3.62"x4.57"x8.27" Weight: 2.75lbs UPC: 0-46221-15002-5	Master Carton: Dimensions: 9.25"x12.60"x11.22" Weight: 18.30lbs Quantity: 6 UPC: 10046221150022
	Inner Carton: Dimensions: 4.01"x8.78"x5.12" Weight: 2.89lbs	Units Per Pallet: NA - 360 Units EU - 270 Units

INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Blinks "on" and "off" when the internal battery is too hot/too cold.




MANUAL OVERRIDE.


Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



WHAT'S IN THE BOX

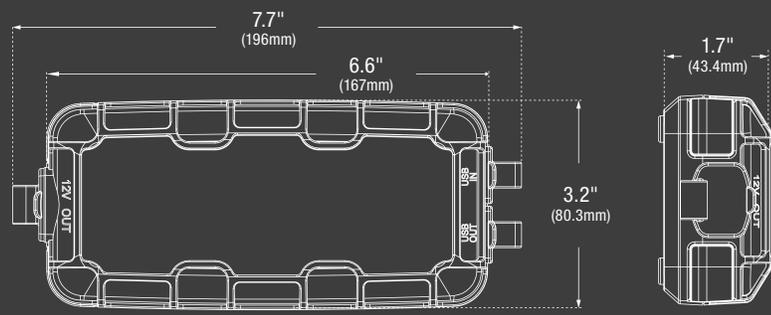

*Accessories not to scale with GB40

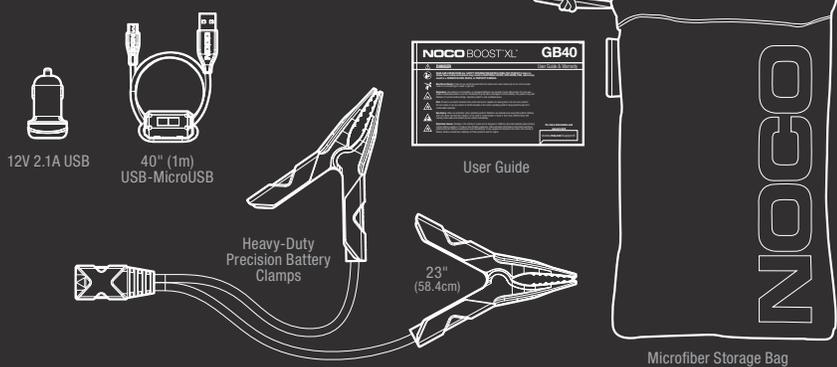

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V

1500A

GB50



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 7.0L GAS & 4.5L DIESEL.

Designed for gas engines up to 7 liters and diesel engines up to 4.5 liters for small diesel cars, SUVs, boats, trucks, ATVs, motorcycles and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

30X

UP TO 30 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 1,500 amps. Full power to jump start a vehicle up to 30 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

12V

2000A

GB70



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 8.0L GAS & 6.0L DIESEL.

Designed for gas engines up to 8 liters and diesel engines up to 6 liters for cars, SUVs, trucks, boats, RVs, and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

40X

UP TO 40 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 2,000 amps. Full power to jump start a vehicle up to 40 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Blinks "on" and "off" when the internal battery is too hot/too cold.




MANUAL OVERRIDE.

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



WHAT'S IN THE BOX

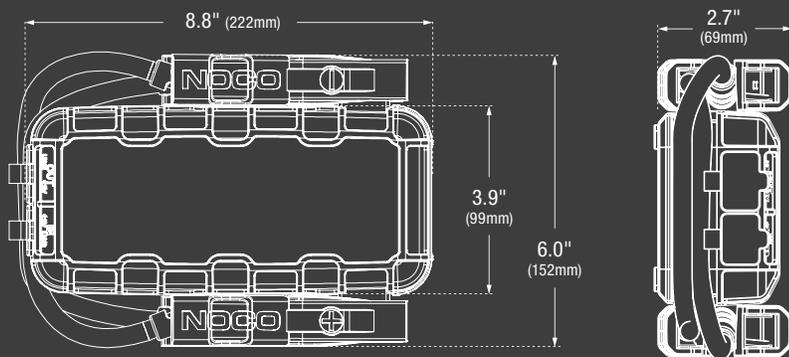

*Accessories not to scale with GB70



XGC Extension Cable



USB-MicroUSB




User Guide



XGC 12V Male Adapter



XGC 12V Female Adapter



Microfiber Storage Bag

CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 6 smartphone recharges.

RECHARGE TIME

0.5A	28hr
1A	14hr
2A	7hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	56 Watt-Hour Lithium Ion
PEAK CURRENT RATING:	2000A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
MICRO USB (INPUT):	5V, 2.1A
USB (OUTPUT):	5V, 2.1A
XGC (INPUT):	12 VDC, 3A Fast Charge
XGC (OUTPUT):	12 VDC, 15A Power Supply
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
UNIT WEIGHT:	4 lbs (1.81kg)
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	5 lbs (2.26kg)
LED FLASHLIGHT:	400 Lumens
VOLUMETRICS:	Retail Packaging: Dimensions: 7.28"x4.84"x9.80" Weight: 5.09lbs UPC: 0-46221-15005-6
	Master Carton: Dimensions: 15.98"x10.83"x11.50" Weight: 22.60lbs Quantity: 4 UCC: 10046221150053
	Inner Carton: Dimensions: 10.27"x7.72"x5.39" Weight: 5.44lbs
	Units Per Pallet: NA - 180 Units EU - 120 Units

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V

3000A

GB150



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 9.0L GAS & 7.0L DIESEL.
Designed for both gas engines up to 9.0 liters and diesel engines up to 7.0 liters for cars, SUVs, trucks, boats, RVs, and more.

USB

CHARGE & RECHARGE.
It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

80X

UP TO 80 JUMPSTARTS.
Compact, yet powerful lithium jump starter rated at 3,000 amps. Full power to jump start a vehicle up to 80 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.
Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



LEAD ACID
WET | GEL | MF | EFB | AGM
AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Blinks "on" and "off" when the internal battery is too hot/too cold.



MANUAL OVERRIDE.

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 6 smartphone recharges.

RECHARGE TIME

0.5A	45hr
1A	22hr
2A	11hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	88 Watt-Hour Lithium Ion
PEAK CURRENT RATING:	3000A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
MICRO USB (INPUT):	5V, 2.1A
USB (OUTPUT):	5V, 2.1A
XGC (INPUT):	12 VDC, 5A Fast Charge
XGC (OUTPUT):	12 VDC, 15A Power Supply
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection


UNIT WEIGHT: 6 lbs (2.72kg)

UNIT WEIGHT W/ CLAMPS & ACCESSORIES: 7.5 lbs (3.4kg)

LED FLASHLIGHT: 500 Lumens

VOLUMETRICS:	Retail Packaging:	Master Carton:
	Dimensions: 8.19"x4.88"x13.70"	Dimensions: 14.76"x9.25"x12.50"
	Weight: 8.00lbs	Weight: 17.97lbs
	UPC: 0-46221-15006-3	Quantity: 2
		UCC: 100.46221150060
	Inner Carton:	Units Per Pallet:
	Dimensions: 14.09"x8.78"x5.79"	NA - 100 Units
	Weight: 8.46lbs	EU - 72 Units

WHAT'S IN THE BOX

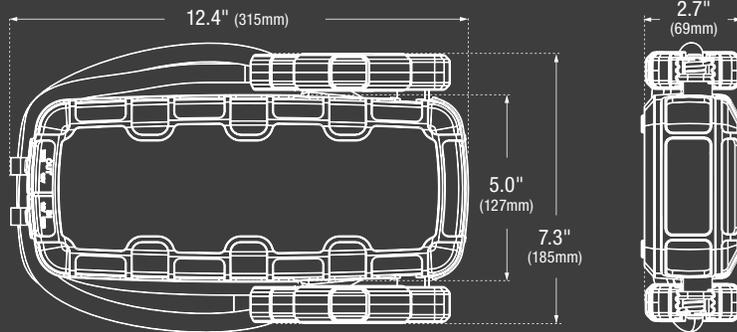

*Accessories not to scale with GB150



XGC Extension Cable



User Guide



Microfiber Storage Bag



USB to Micro USB 40" (1m)



XGC 12V Male Adapter



XGC 12V Female Adapter

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V

1250A

GBX45



EXTREME POWER. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

6.5L GAS & 4.0L DIESEL.

Designed for gas engines up to 6.5 liters and diesel engines up to 4.0 liters for small diesel cars, SUVs, boats, trucks, ATVs, motorcycles and more.

0% TO BOOST

FAST CHARGE.

Boost X is equipped with USB-C technology that, combined with power delivery, gives you lightning-fast recharges. Completely recharge Boost X in less time, or go from 0% to jump starting in just 5-minutes of charge.



60-SECOND TIMEOUT.

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0

ULTRASAFE 2.0.

We took our UltraSafe technology and made it better. It's still our simple, mistake-free design featuring spark-proof technology and reverse polarity protection, but with enhanced thermal efficiency and power management to provide better performance and longer battery life.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



FAST CHARGE

Illuminates white when fast charge is active. Fast charge LED turns red (solid/blinking) when there is an error.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



ERROR

Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low.



CHARGE LED

Indicates the charge level of the internal battery.



HOT INDICATOR

Illuminates solid or flashes red when internal temperature is too high.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



CHARGE DEVICES.

Power everything. With USB-C Power Delivery, you have the power to charge almost everything. Its internal power bank provides 60-watts of power—both in and out—to effortlessly power our favorite USB-C devices, like phones, tablets, laptops, wearables, and more.


RECHARGE TIME

16h	2.5W
8h	5W
4h	10W


TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	31 Wh Lithium Ion
PEAK CURRENT RATING:	1250A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
USB-C (IN):	5V (1.5A/9V 3A/12V 3A/15V 3A/20V 3A)
USB-C (OUT):	5V (3A/9V 3A/12V 3A/15V 3A/20V 3A)
USB (OUTPUT):	5VDC 2.1A Max / 10 W Max
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
WEIGHT:	1.3 lbs (0.59kg)
LED FLASHLIGHT:	100 Lumens
VOLUMETRICS:	<p>Retail Packaging: Dimensions: 3.62" x 4.96" x 8.23" Weight: 2.84 lbs UPC: 0-46221-20006-5</p> <p>Master Carton: Dimensions: 9.25" x 12.60" x 12.01" Weight: 19.05 lbs Quantity: 6 UPC: 10046221200062</p> <p>Inner Carton: Dimensions: 3.98" x 8.66" x 5.43" Weight: 3.0 lbs</p> <p>Units Per Pallet: 270 Units</p>

WHAT'S IN THE BOX

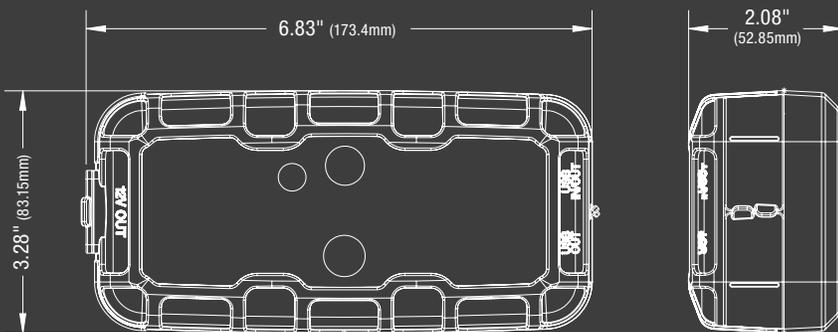

*Accessories not to scale with GBX45

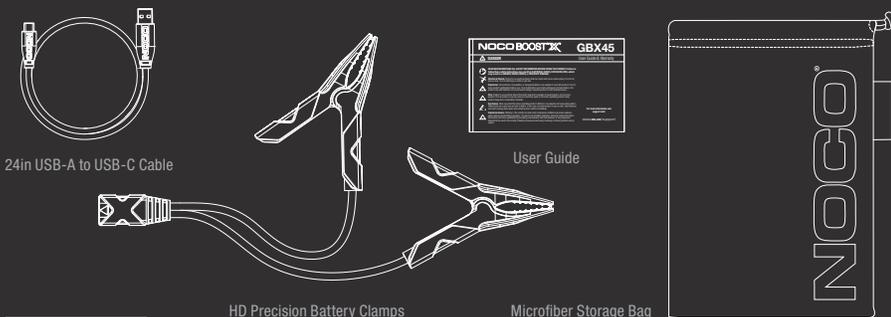

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V

1750A

GBX55



EXTREME POWER. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

7.5L GAS & 5.0L DIESEL.
Designed for gas engines up to 7.5 liters and diesel engines up to 5.0 liters for small diesel cars, SUVs, boats, trucks, ATVs, motorcycles and more.

0% TO BOOST

FAST CHARGE.
Boost X is equipped with USB-C technology that, combined with power delivery, gives you lightning-fast recharges. Completely recharge Boost X in less time, or go from 0% to jump starting in just 5-minutes of charge.



60-SECOND TIMEOUT.
An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0

ULTRASAFE 2.0.
We took our UltraSafe technology and made it better. It's still our simple, mistake-free design featuring spark-proof technology and reverse polarity protection, but with enhanced thermal efficiency and power management to provide better performance and longer battery life.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



FAST CHARGE

Illuminates white when fast charge is active. Fast charge LED turns red (solid/blinking) when there is an error.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



ERROR

Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low.



CHARGE LED

Indicates the charge level of the internal battery.



HOT INDICATOR

Illuminates solid or flashes red when internal temperature is too high.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



CHARGE DEVICES.

Power everything. With USB-C Power Delivery, you have the power to charge almost everything. Its internal power bank provides 60-watts of power—both in and out—to effortlessly power our favorite USB-C devices, like phones, tablets, laptops, wearables, and more.



RECHARGE TIME

28h	2.5W
14h	5W
7.2h	10W


TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	46 Wh Lithium Ion
PEAK CURRENT RATING:	1750A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
USB-C (IN):	5V (1.5A/9V 3A/12V 3A/15V 3A/20V 3A)
USB-C (OUT):	5V (3A/9V 3A/12V 3A/15V 3A/20V 3A)
USB (OUT):	5VDC 2.1A Max / 10 W Max
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
WEIGHT:	2.58 lbs (1.17kg)
LED FLASHLIGHT:	200 Lumens
VOLUMETRICS:	Retail Packaging: Dimensions: 3.94" x 6.34" x 9.13" Weight: 3.37 lbs UPC: 0-46221-20007-2
	Master Carton: Dimensions: 9.92" x 20.47" x 9.53" Weight: 22.64 lbs Quantity: 6 UCC: 10046221200079
	Inner Carton: Dimensions: 4.33" x 9.49" x 6.57" Weight: 3.57 lbs
	Units Per Pallet: 234 Units

WHAT'S IN THE BOX

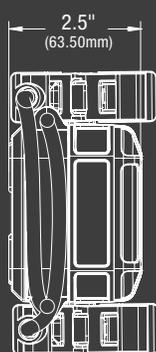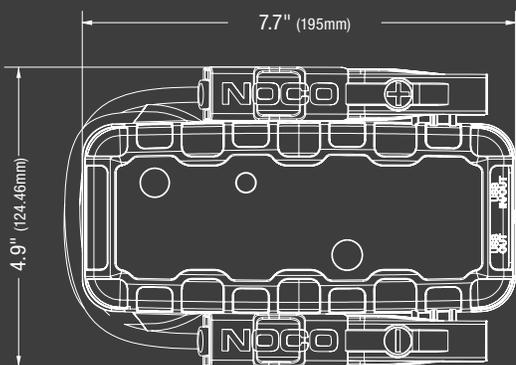


*Accessories not to scale with GBX55



24in USB-A to USB-C Cable



User Guide

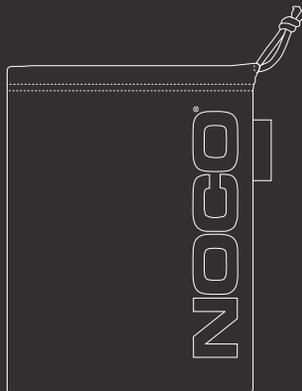

Microfiber Storage Bag

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



12V

2500A

GBX75



EXTREME POWER. ULTRASAFE[®] LITHIUM JUMP STARTER.™

GAS & DIESEL

8.5L GAS & 6.5L DIESEL.

Designed for gas engines up to 8.5 liters and diesel engines up to 6.5 liters for cars, SUVs, trucks, boats, RVs, and more.

0% TO BOOST

FAST CHARGE.

Boost X is equipped with USB-C technology that, combined with power delivery, gives you lightning-fast recharges. Completely recharge Boost X in less time, or go from 0% to jump starting in just 5-minutes of charge.



60-SECOND TIMEOUT.

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0

ULTRASAFE 2.0.

We took our UltraSafe technology and made it better. It's still our simple, mistake-free design featuring spark-proof technology and reverse polarity protection, but with enhanced thermal efficiency and power management to provide better performance and longer battery life.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



FAST CHARGE

Illuminates white when fast charge is active. Fast charge LED turns red (solid/blinking) when there is an error.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



ERROR

Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low.



CHARGE LED

Indicates the charge level of the internal battery.



HOT INDICATOR

Illuminates solid or flashes red when internal temperature is too high.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



CHARGE DEVICES.

Power everything. With USB-C Power Delivery, you have the power to charge almost everything. Its internal power bank provides 60-watts of power—both in and out—to effortlessly power our favorite USB-C devices, like phones, tablets, laptops, wearables, and more.


RECHARGE TIME

40h	2.5W
20h	5W
10h	10W


TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	74 Wh Lithium Ion
PEAK CURRENT RATING:	2500A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
USB-C (IN):	5V (1.5A/9V 3A/12V 3A/15V 3A/20V 3A)
USB-C (OUT):	5V (3A/9V 3A/12V 3A/15V 3A/20V 3A)
USB (OUT):	5VDC 2.1A Max / 10 W Max
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
WEIGHT:	3.77 lbs (1.71kg)
LED FLASHLIGHT:	400 Lumens
VOLUMETRICS:	Retail Packaging: Dimensions: 7.28" x 4.84" x 9.80" Weight: 5.01 lbs UPC: 0-46221-20008-9
	Master Carton: Dimensions: 15.98" x 10.83" x 11.50" Weight: 22.83 lbs Quantity: 4 UCC: 10046221200086
	Inner Carton: Dimensions: 10.24" x 7.68" x 5.32" Weight: 5.31 lbs
	Units Per Pallet: 120 Units


WHAT'S IN THE BOX

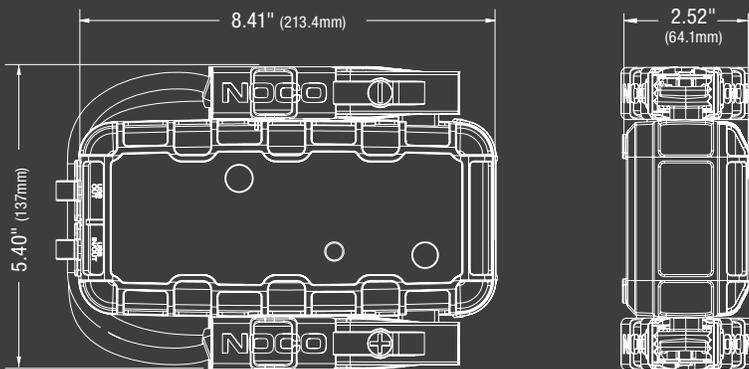

*Accessories not to scale with GBX75




24in (0.6m) 12V to USB-C Cable



24in USB-A to USB-C Cable



User Guide

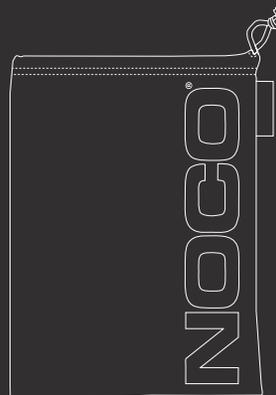

Microfiber Storage Bag

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



6V & 12V

1A

GENIUS1



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

**6V &
12V**

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

**ZERO
VOLTS**

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

35%

SMALLER AND MORE POWER.

Similar to our G750, just better. It's 35% smaller and delivers 35% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.




30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



LEAD ACID

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

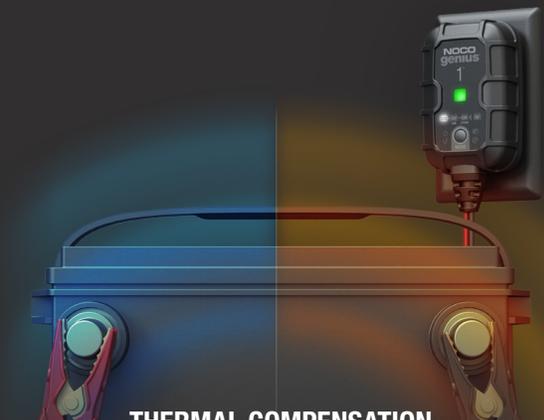

THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature, limiting the chance of under-charging or over-charging, providing a more accurate and fully charged battery.

CHARGING MODES

12V
Used for 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



AGM
Used for 12V AGM or maintenance-free batteries.



LITHIUM
Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).



6V
Used for 6V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



ADVANCED DIAGNOSTICS

STANDBY
The charger is in standby or the battery voltage is too low for the charger to detect.



BAD BATTERY
There is a possible battery short or the battery will not hold a charge. Consult a professional.



HIGH VOLTAGE
The battery voltage is too high for the selected charge mode. Check the battery and charge mode.



REVERSE POLARITY
Charger is connected to the battery in reverse. Reverse the connections.





Battery Size CHARGING TIMES



*Approximate charging times at 50% depth of discharge.


WHAT'S IN THE BOX

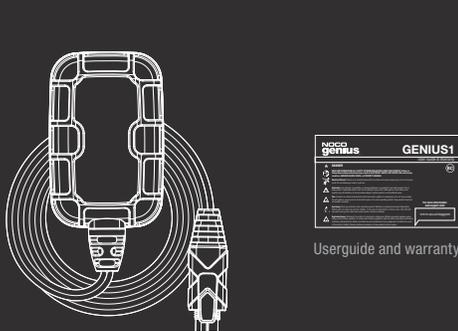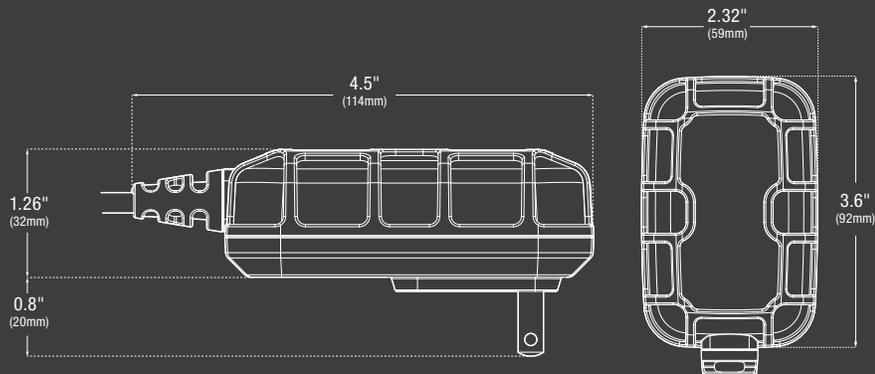

GENIUS1 Battery Charger + Maintainer



Userguide and warranty

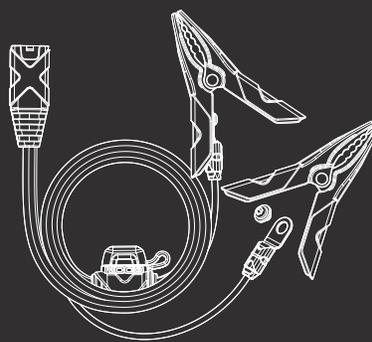

Battery Clamps + M6 Integrated Eyelets (6mm)

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	120-240 VAC, 50-60Hz	
OUTPUT POWER:	15 Watts Max	
CHARGING VOLTAGE:	Various	
CHARGING CURRENT:	1A (12V), 1A (6V)	
CHEMISTRY:	Lead-Acid and Lithium	
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)	
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)	
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)	
BACK CURRENT DRAIN:	<0.5mA	
BATTERY CAPACITY:	Up to 30Ah, Maintains All Battery Sizes	
HOUSING PROTECTION:	IP60	
COOLING:	Natural Convection	
UNIT WEIGHT:	0.77 lbs (0.35 kg)	
VOLUMETRICS:	Retail Packaging: Dimensions: 3.43"x4.02"x6.73" Weight: 0.95lbs UPC: 0-46221-19002-1	Master Carton: Dimensions: 14.65"x11.81"x4.96" Weight: 7.2lbs Quantity: 6 UCC: 10046221190028
	Inner Carton: Dimensions: 3.70"x4.25"x6.97" Weight: 1.08lbs	Units Per Pallet: NA - 480 Units International - 378 Units



30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



6V & 12V

2A

GENIUS2



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

**6V &
12V**

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

**ZERO
VOLTS**

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

140%

MORE POWER.

Similar to our G1100, just better. It's 30% smaller and delivers 140% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



LEAD ACID
AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



CHARGING MODES

- 12V**
 Used for 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.
- AGM**
 Used for 12V AGM or maintenance-free batteries.
- LITHIUM**
 Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).
- 6V**
 Used for 6V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.

ADVANCED DIAGNOSTICS

- STANDBY**
 The charger is in standby or the battery voltage is too low for the charger to detect.
- BAD BATTERY**
 There is a possible battery short or the battery will not hold a charge. Consult a professional.
- HIGH VOLTAGE**
 The battery voltage is too high for the selected charge mode. Check the battery and charge mode.
- REVERSE POLARITY**
 Charger is connected to the battery in reverse. Reverse the connections.
- CHARGE LED**
 Indicates the charge level of the internal battery.


THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature, limiting the chance of under-charging or over-charging, providing a more accurate and fully charged battery.

Battery Size	CHARGING TIMES
20Ah	7.5hr
40Ah	15hr
80Ah	30hr
100Ah	60hr


*Approximate charging times at 50% depth of discharge.

WHAT'S IN THE BOX

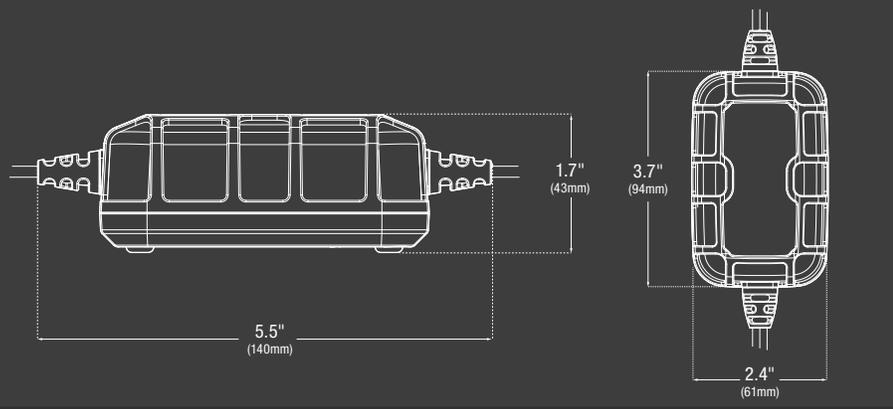

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	120-240 VAC, 50-60Hz
OUTPUT POWER:	30 Watts Max
CHARGING VOLTAGE:	Various
CHARGING CURRENT:	2A (12V), 2A (6V)
CHEMISTRY:	Lead-Acid and Lithium
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)
BACK CURRENT DRAIN:	<0.5mA
BATTERY CAPACITY:	Up to 40Ah, Maintains All Battery Sizes
HOUSING PROTECTION:	IP65
COOLING:	Natural Convection
UNIT WEIGHT:	1.1 lbs (0.50 kg)
VOLUMETRICS:	Retail Packaging: Dimensions: 3.43" x 4.25" x 6.97" Weight: 1.23lbs UPC: 0-46221-19003-8 Inner Carton: Dimensions: 3.70" x 4.49" x 7.20" Weight: 1.28lbs
	Master Carton: Dimensions: 15.12" x 11.81" x 5.20" Weight: 8.45lbs Quantity: 6 UCC: 10046221190035 Units Per Pallet: NA - 480 Units International - 378 Units

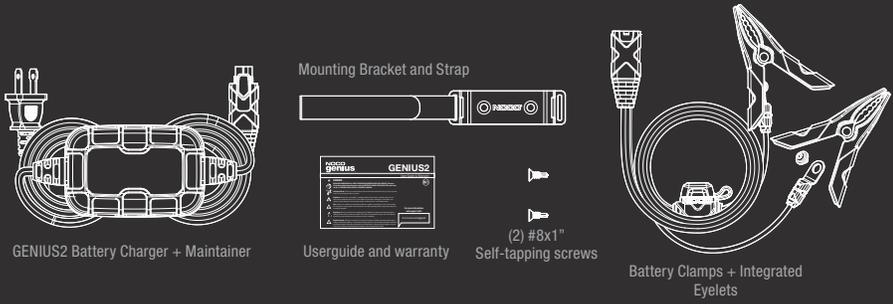

NOCO
 30339 Diamond Parkway, #102
 Glenwillow, OH 44139 | USA
 1.800.456.6626
no.co



6V & 12V

5A

GENIUS5



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

**6V &
12V**

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

**ZERO
VOLTS**

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

65%

MORE POWER.

Similar to our G3500, just better. It's 34% smaller and delivers 65% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



CHARGING MODES

12V

Used for 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



AGM

Used for 12V AGM or maintenance-free batteries.



LITHIUM

Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).



6V

Used for 6V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



REPAIR

Used to repair old, idle, damaged, stratified, or sulfated batteries.



ADVANCED DIAGNOSTICS

HIGH VOLTAGE

The battery voltage is too high for the selected charge mode. Check the battery and charge mode.



BAD BATTERY

There is a possible battery short or the battery will not hold a charge. Consult a professional.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



STANDBY

The charger is in standby or the battery voltage is too low for the charger to detect.





CHARGE LED

Indicates the charge level of the internal battery.



WHAT'S IN THE BOX

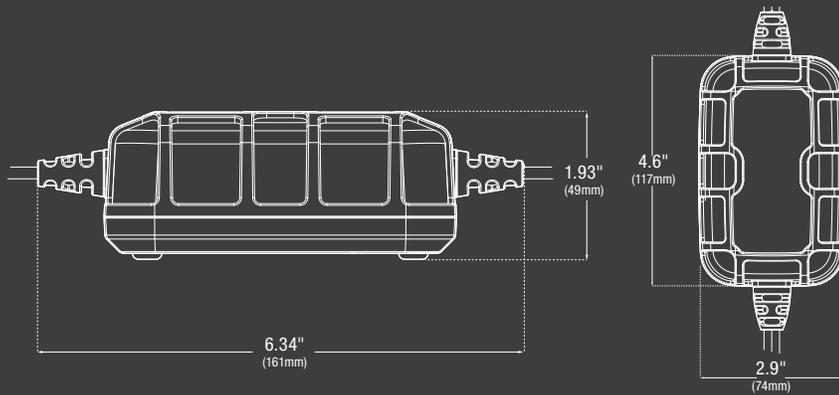


GENIUS5 Battery Charger + Maintainer



Userguide and Warranty



(2) #8x1" Self-tapping screws



Battery Clamps + Integrated Eyelets

THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature, limiting the chance of under-charging or over-charging, providing a more accurate and fully charged battery.

Battery Size CHARGING TIMES

Battery Size	Charging Time	Notes
20Ah	3hr	*Approximate charging times at 50% depth of discharge.
40Ah	6hr	
80Ah	12hr	
100Ah	15hr	

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	120-240 VAC, 50-60Hz
OUTPUT POWER:	75 Watts Max
CHARGING VOLTAGE:	Various
CHARGING CURRENT:	5A (12V), 5A (6V)
CHEMISTRY:	Lead-Acid and Lithium
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)
BACK CURRENT DRAIN:	<0.5mA
BATTERY CAPACITY:	Up to 120Ah, Maintains All Battery Sizes
HOUSING PROTECTION:	IP65
COOLING:	Natural Convection
UNIT WEIGHT:	1.5 lbs (0.68 kg)
VOLUMETRICS:	Retail Packaging: Dimensions: 4.61" x 3.43" x 7.95" Weight: 1.59lbs UPC: 0-46221-19004-5
	Master Carton: Dimensions: 17.10" x 11.97" x 5.51" Weight: 11.31lbs Quantity: 6 UCC: 10046221190042
	Inner Carton: Dimensions: 4.84" x 3.70" x 8.19" Weight: 1.74lbs
	Units Per Pallet: NA - 336 Units International - 252 Units

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



6V & 12V

10A

GENIUS10



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

**6V &
12V**

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

**ZERO
VOLTS**

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

115%

MORE POWER.

Similar to our G7200, just better. It's 34% smaller and delivers 65% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

NOCO genius 10™



CHARGING MODES

LEAD-ACID

Used for 6V & 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



ADVANCED DIAGNOSTICS

HIGH VOLTAGE

The charger is in standby or the battery voltage is too low for the charger to detect.



AGM

Used for 6V & 12V AGM or maintenance-free batteries.



BAD BATTERY

There is a possible battery short or the battery will not hold a charge. Consult a professional.



LITHIUM

Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



REPAIR

Used to repair old, idle, damaged, stratified, or sulfated batteries.



STANDBY

The charger is in standby or the battery voltage is too low for the charger to detect.



SUPPLY

Converts to a DC power supply for 12V DC devices, or as a memory retainer when replacing a battery.



CHARGE LED

Indicates the charge level of the internal battery.



THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature, limiting the chance of under-charging or over-charging, providing a more accurate and fully charged battery.



Battery Size CHARGING TIMES

Battery Size	Charging Time	Notes
20Ah	1.5hr	*Approximate charging times at 50% depth of discharge.
40Ah	3hr	
80Ah	6hr	
100Ah	7.5hr	

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	120-240 VAC, 50-60Hz	
OUTPUT POWER:	150 Watts Max	
CHARGING VOLTAGE:	Various	
CHARGING CURRENT:	10A (12V), 10A (6V)	
CHEMISTRY:	Lead-Acid and Lithium	
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)	
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)	
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)	
BACK CURRENT DRAIN:	<0.5mA	
BATTERY CAPACITY:	Up to 230Ah, Maintains All Battery Sizes	
HOUSING PROTECTION:	IP65	
COOLING:	Natural Convection	
UNIT WEIGHT:	3.33 lbs (1.51 kg)	
VOLUMETRICS:	Retail Packaging: Dimensions: 4.41" x 4.48" x 9.10" Weight: 3.99lbs UPC: 0-46221-19005-2	Master Carton: Dimensions: 19.02" x 9.84" x 5.71" Weight: 17.42lbs Quantity: 4 UCC: 10046221190059
	Inner Carton: Dimensions: 4.60" x 4.76" x 9.21" Weight: 4.17lbs	Units Per Pallet: NA - 280 Units International - 224 Units

WHAT'S IN THE BOX

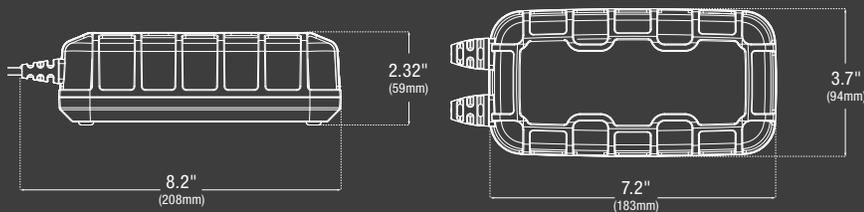

GENIUS10 Battery Charger + Maintainer




Mounting Bracket and Strap



Userguide and warranty



(2) #8x1" Self-tapping screws



Battery Clamps + Integrated Eyelets

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



6V&12V

GENIUS SERIES

MULTI-BANK



8A

4 BANK

2A 2A 2A 2A

GENIUS2X4



4A

2 BANK

2A 2A

GENIUS2X2

MULTI-BANK BATTERY CHARGERS AND MAINTAINERS.™

2A PER BANK

MULTI-BANK.

Charge and maintain multiple batteries at once. Designed for cars, motorcycles, boats, ATVs, RVs, lawn mowers, lawn tractors, trucks, and more.

0.0V

FORCE MODE.

For extremely dead batteries lower than 1-volt, manually turn on force mode to detect and charge batteries all the way down to zero volts.

24/7

ZERO OVERCHARGE.

Safely charge any battery year-round. Charge continuously without user intervention and with zero risk of overcharging your battery.

6V|12V

MULTI-CHEMISTRY. MULTI-TYPE.

Charge flooded, gel, maintenance-free, AGM, and lithium batteries. For use with starter, deep-cycle, and more.



LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



104°F
40°C



-4°F
-20°C

CHARGING MODES

12V

Used for 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



AGM

Used for 12V AGM or maintenance-free batteries.



LITHIUM

Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).



6V

Used for 6V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



FORCE MODE

Used to charge batteries below 1V. All charge mode LED's will flash and the selected mode will illuminate. Management Systems (BMS).



ADVANCED DIAGNOSTICS

STANDBY

The charger is in standby or the battery voltage is too low for the charger to detect.



BAD BATTERY

There is a possible battery short or the battery will not hold a charge. Consult a professional.



HIGH VOLTAGE

The battery voltage is too high for the selected charge mode. Check the battery and charge mode.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



TEMPERATURE

The charger internal temperature is too high. Charger will resume once the temperature is back within operating limits.



THERMAL COMPENSATION.

The new integrated thermal sensor automatically monitors and adjusts the charging cycle based on fluctuations of ambient temperature. Avoids under-charging in cold weather down to -4F° and avoids over-charging in hot weather up to 104F°.

Battery Size CHARGING TIMES

8Ah	3hr	*Approximate charging times at 50% depth of discharge.
12Ah	4.5hr	
18Ah	6.75hr	
24Ah	9hr	
40Ah	15hr	



GENIUS2X2

GENIUS2X4

CHARGING CURRENT:	4A
CURRENT PER BANK:	2A
OUTPUT POWER:	60W
CHARGING BANKS:	2
DIMENSIONS:	4.4 x 5.1 x 1.9in (112 x 130 x 48mm)
WEIGHT:	1.1 lbs (0.5kg)
WHATS IN THE BOX:	<ul style="list-style-type: none"> • GENIUS2X2 Battery Charger w/ (2) Interchangeable Connectors • (2) Clamps w/ Integrated Eyelets • (2) 10' Extension Cords • (2) #8 27mm Self-Tapping Screws • Type A, C, G, and I Power Cables • User Guide & Warranty Information
VOLUMETRICS:	<p>Retail Packaging: Dimensions: 6.97" x 10.24" x 5.31" Weight: 4.63lbs UPC: 0-46221-19042-7</p> <p>Master Carton: Dimensions: 10.98" x 15.04" x 6.57" Weight: 10.8lbs Quantity: 2 UCC: 10046221190424</p> <p>Inner Carton: Dimensions: 7.17" x 10.55" x 5.67" Weight: 4.85lbs</p> <p>Units Per Pallet: 192 Units</p>

CHARGING CURRENT:	8A
CURRENT PER BANK:	2A
OUTPUT POWER:	120W
CHARGING BANKS:	4
DIMENSIONS:	5.7 x 9.4 x 2.3in (145 x 239 x 58mm)
WEIGHT:	3.9 lbs (1.77kg)
WHATS IN THE BOX:	<ul style="list-style-type: none"> • GENIUS2X4 Battery Charger w/ (4) Interchangeable Connectors • (4) Clamps w/ Integrated Eyelets • (4) 10' Extension Cords • (2) #8 27mm Self-Tapping Screws • Type A, C, G, and I Power Cables • User Guide & Warranty Information
VOLUMETRICS:	<p>Retail Packaging: Dimensions: 10.8" x 9.9" x 5.7" Weight: 7.78lbs UPC: 0-46221-19045-8</p> <p>Master Carton: Dimensions: 21.2" x 11.5" x 7" Weight: 18.73lbs Quantity: 2 UCC: 10046221190455</p> <p>Inner Carton: Dimensions: 9.57" x 7.25" x 5.63" Weight: 15.43lbs</p> <p>Units Per Pallet: 60 Units</p>

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE AC:	100-240 VAC, 50-60Hz	AMBIENT TEMPERATURE:	-20°C to +40°C
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)	HOUSING PROTECTION:	IP60
BACK CURRENT DRAIN:	<0.5mA	COOLING:	Natural Convection

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

